


INJECTASEAL®

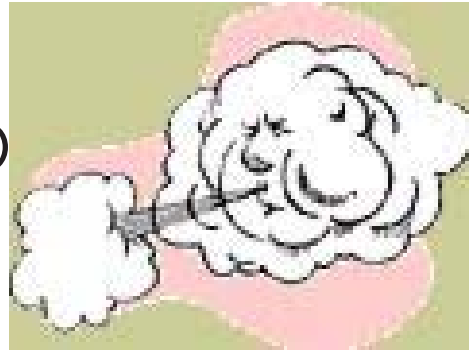

TEST RESULTS

Surface Burning Characteristics

*Class A (Class I) Rating
Flame Spread Index – 10
Smoke Developed Index – 95*

Thermal Resistance

R-Value per Inch – 4.6 / inch @ 75°F mean temperature

Dry Foam Density

1.20 - 1.80 lb/ft³

Fresh Foam Density

3.5 - 4.0 lb/ft³

Fire Resistance Rating

InjectASeal neither adds to nor detracts from the fire rating of a wall.

Dimensional Stability (Shrinkage)

0.25 percent, typically

Product Yield

*3,700 board feet
1,100 ft² of 2x4 wall
700 ft² of 2x6 wall*

Shelf-Life of Blended Foam

30 Days

Compressive Strength

4.50 lb_f/in²

Water Vapor Transmission

10.6 perms